


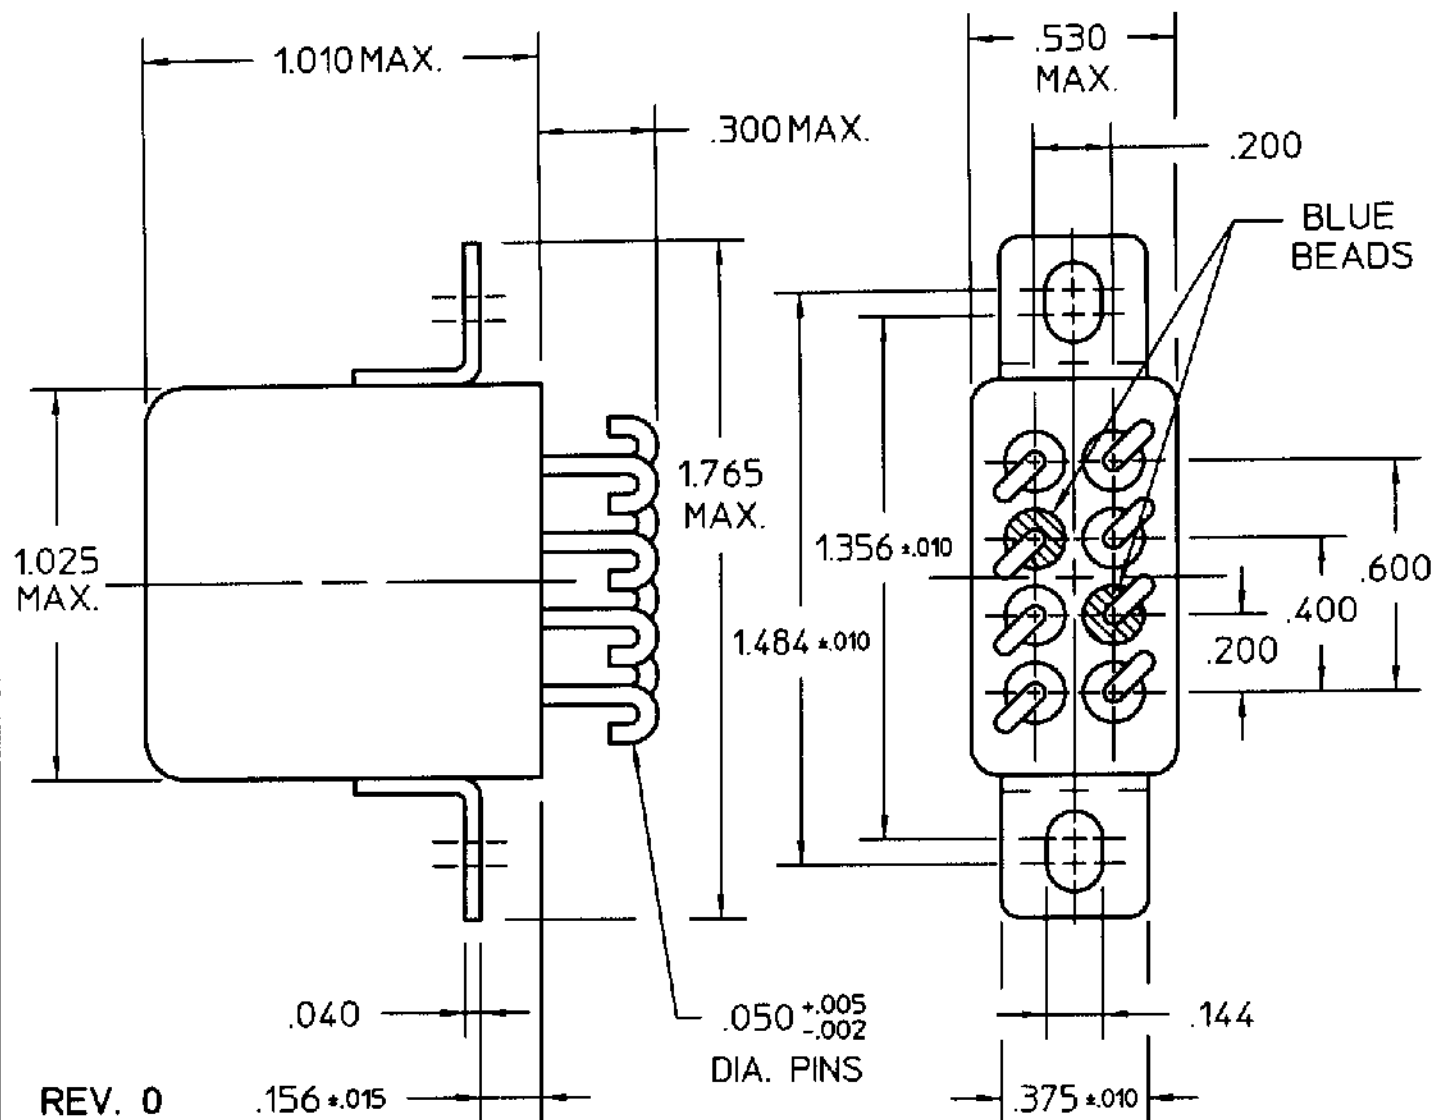


COIL: @ 25°C
 RESISTANCE 75 OHMS ±10%
 NOMINAL VOLTAGE 12.0 VDC
 MUST OPERATE 6.5 VDC
 MUST RELEASE 0.9 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 50 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 10 MS MAX.
 CONTACT BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

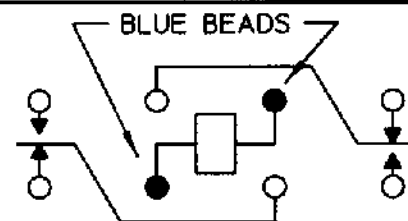

TERMINAL VIEW

CONTACT RATING: 10 AMPS 28 VDC
 RESISTIVE 100,000 OPERATIONS

DR. B.D. 6/16/99 CK. GQH 6-16-99

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. C. I. I. STD
 CUST. NO. REV.

07 RELAY

B07A112BB1