
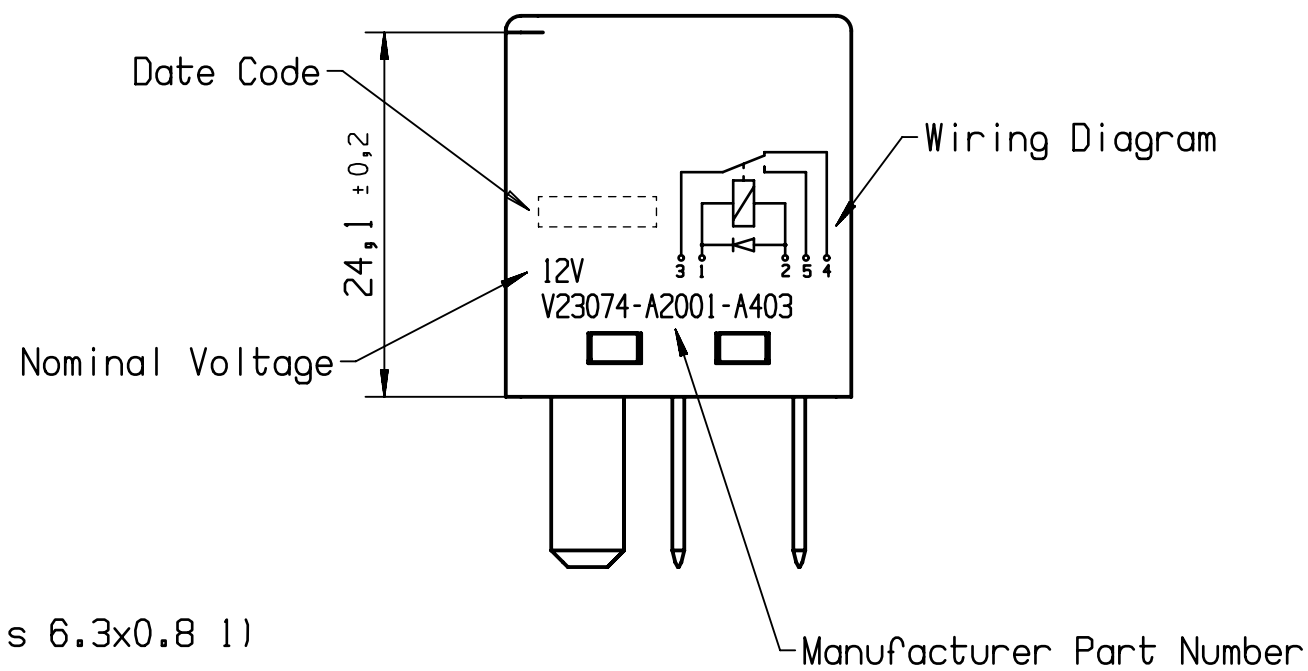
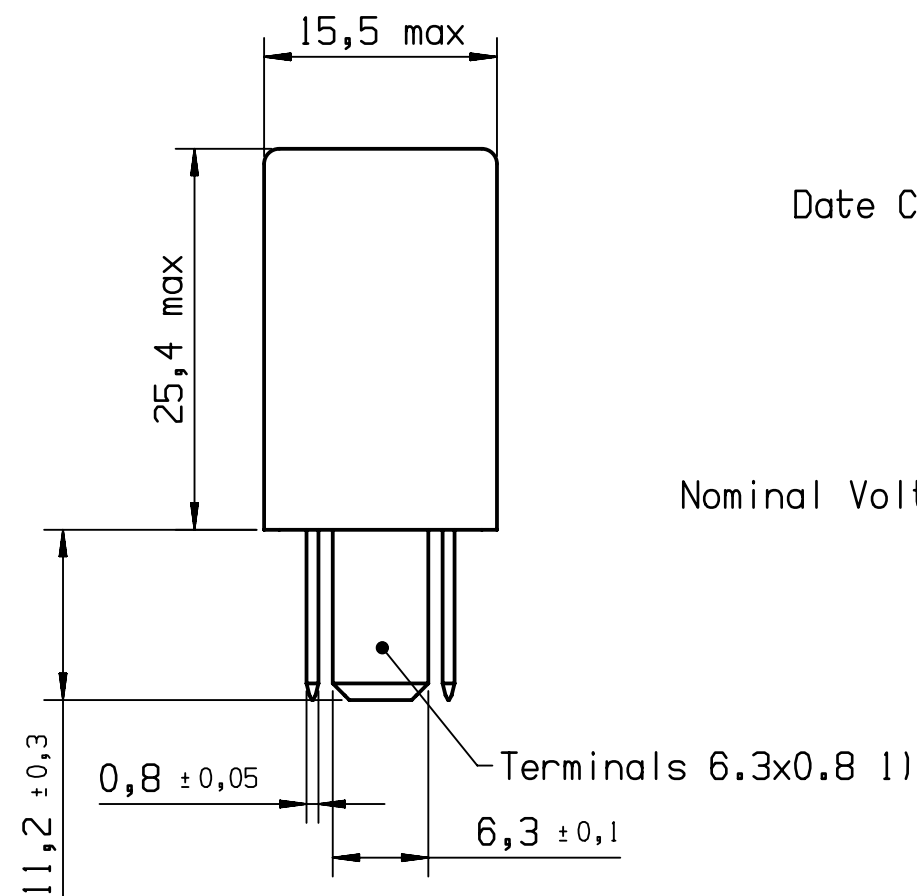
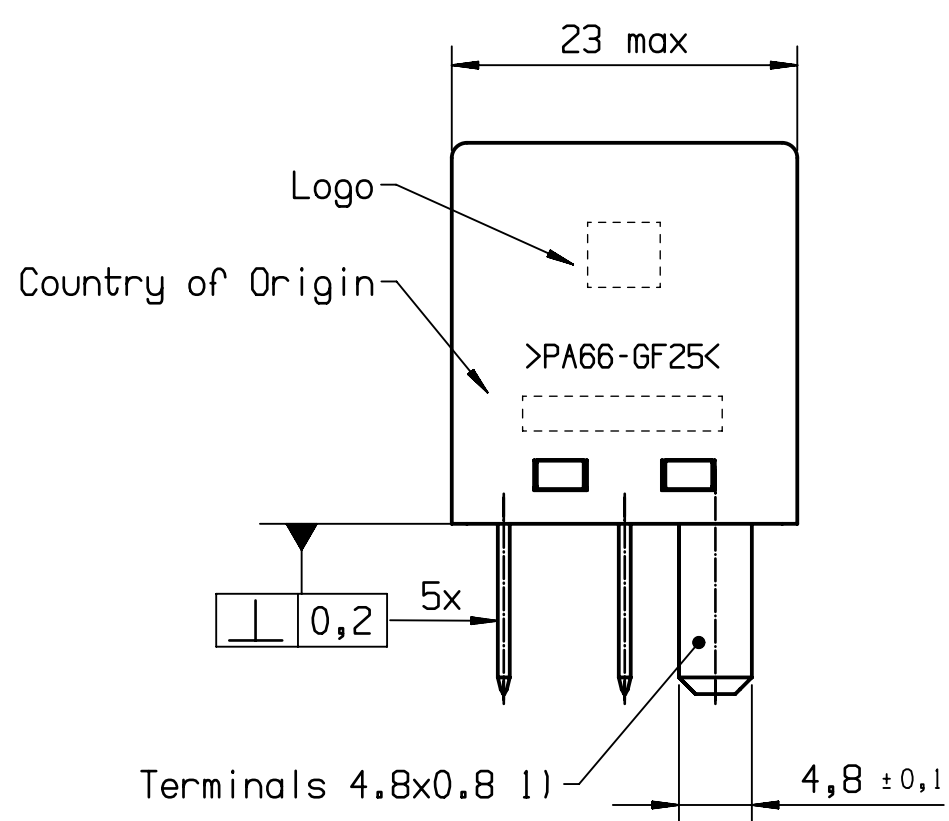


Positional Tolerance: $\pm 0,15$

Terminal Layout
Bottom View

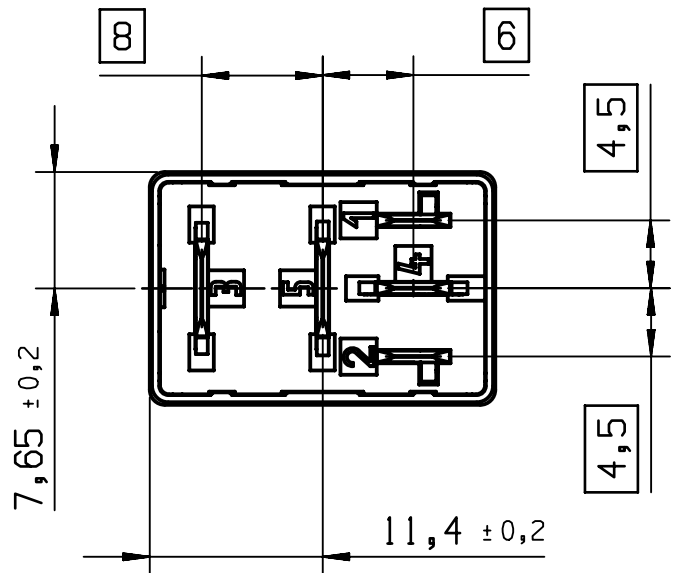

Electrical Characteristics:
Coil Resistance : 119 Ohm
Nominal Voltage : 12V
Pull-in Voltage : 7,2V *)
Dropout Voltage : 1,6V *)
Temperature Range : -40° to +125° C

*) Coil at ambient Temperature

Terminal Shape (1,2,4) with 4.8x0.8
Terminal Shape (3,5) with 6.3x0.8



1) Tray package of 500 pcs = 100 pcs x 5 trays

	Material	Finish	Color
Cover	PA66-GF25		Black
Base	PA66-GF25		Black
Terminal 1 , 2	CuSn	Sn 2..4 µm	
Terminal 3 , 4 , 5	ECu57	Sn 2..4 µm	

CUT EDGES WITHOUT TIN PLATING ALLOWED

Relay Reference	Part Number	Notes
V23074-A2001-A403	6-1419137-4	EV-CBOX
V23074-A2001-A403	9-1904105-7	SZ-CBOX
V23074-A2001-A403	3-1904124-9	EV-TRAY; 1)

View From the Topside
(Rotated 180°)

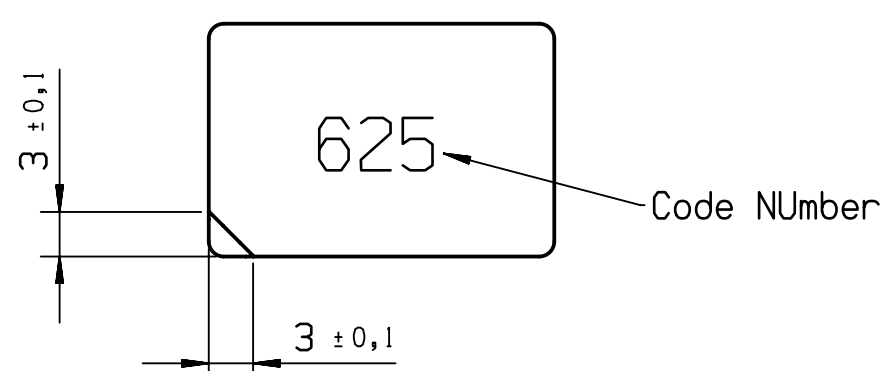

PROPRIETARY THE REPRODUCTION, TRANSMISSION OR USE OF THIS DOCUMENT OR IT'S CONTENTS IS NOT PERMITTED WITHOUT EXPRESSED WRITTEN AUTHORITY. OFFENDERS WILL BE LIABLE FOR ALL DAMAGES. ALL RIGHTS, INCLUDING RIGHTS CREATED BY REGISTERED PATENT(S) GRANTED FOR A UTILITY MODEL OR DESIGN, ARE RESERVED.				CHANGES TO THIS DRAWING MUST BE DONE ONLY IN CAD		PAPER SIZE A2
APPLICABLE SPEC.:				FINISH		
				DIMENSIONS APPLY PLATING		
				TOLERANCE UNLESS SPECIFIED OTHERWISE	SCALE 2:1; 5:1	WEIGHT
				DIMENSIONS IN MM	MATERIAL ---	
				DATE NAME	PART NAME	
				DWN. 11SEP2024 HMF APP.	MICRO A RELAY 12V - DIODE	
				A4 ECO-21-004021 26MAR2021 HMF REV.		
				A3 ECO-20-011741 20AUG2020 HMF LOCATION PE Evora		
				A2 ECO-20-008696 25JUN2010 HMF		
				A1 ECO-16-004230 18MAR2016 HMF	DWG NO. V23074-A2001-A403	
				A INITIAL DRAWING 23OCT2014 HMF	CUSTOMER DRAWING	
				REV. CHANGE ORDER DATE APP.	CLASS 1	