


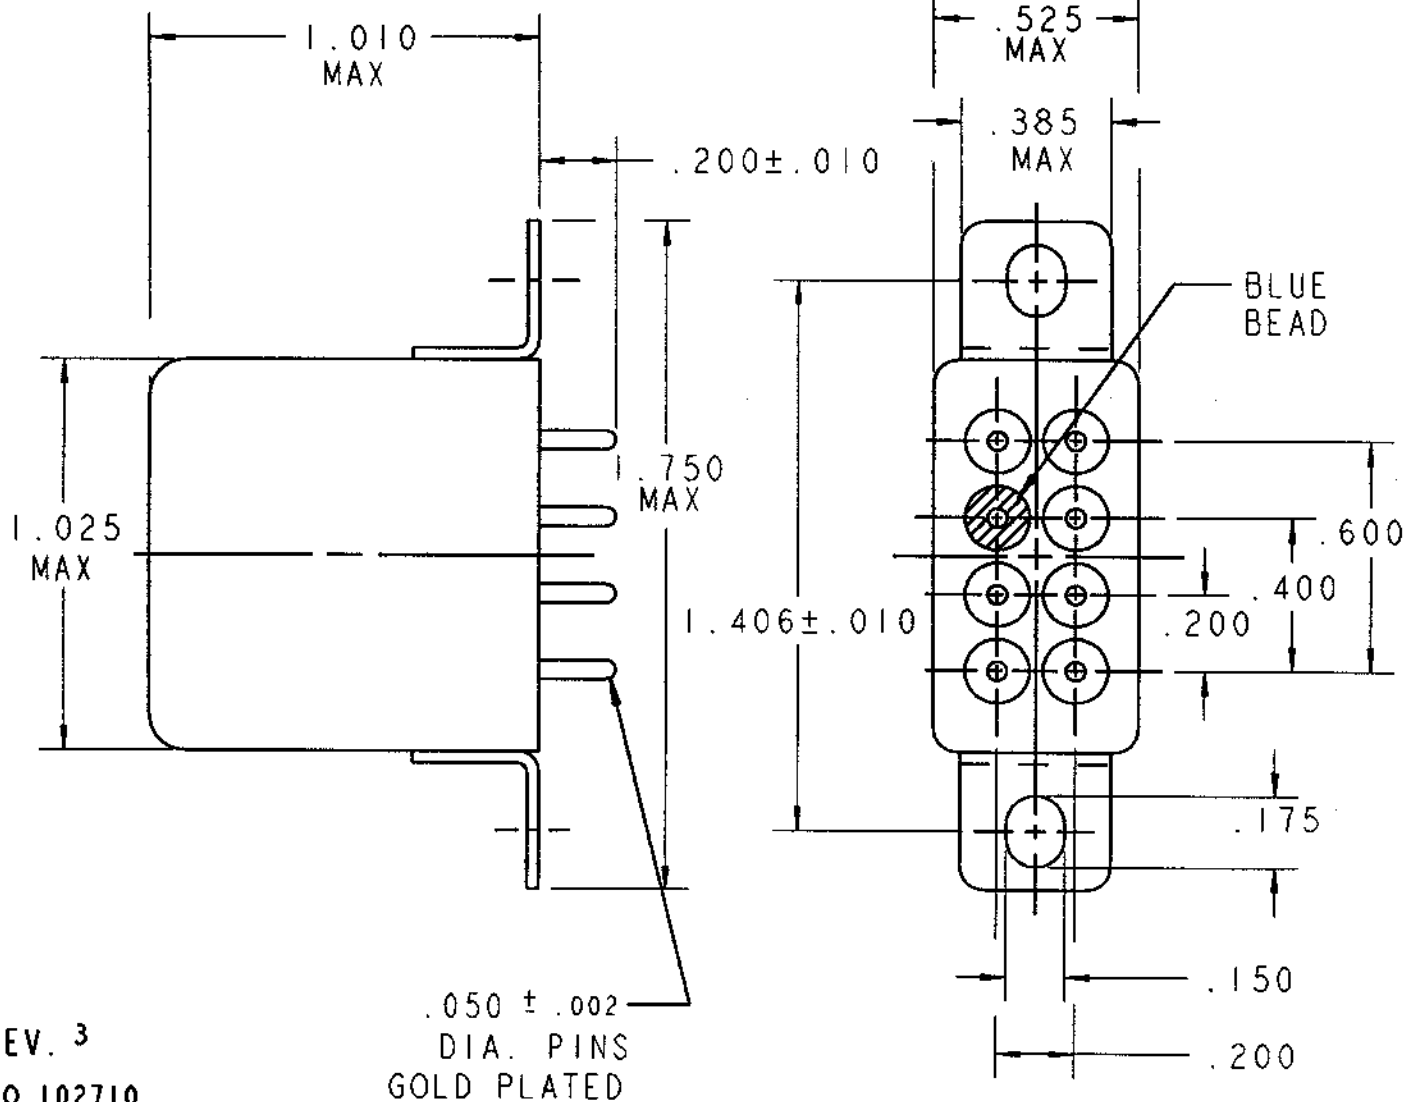

REV. 3

DCO 102710

.050 ± .002
DIA. PINS
GOLD PLATED


COIL: @ 25°C
RESISTANCE 300 OHMS ± 10%
NOMINAL VOLTAGE 26.5 VDC
MUST OPERATE 13.0 VDC
MUST RELEASE 7.0 VDC MAX, 2.3 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's
SHOCK 50 g's 11 MS. DURATION
TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 15 MS MAX.
OPERATE BOUNCE 5 MS MAX
RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

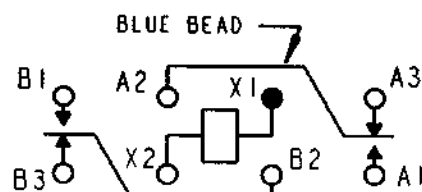

TERMINAL VIEW

CONTACT RATING: 10 AMPS 28 VDC
5 AMPS 115 VAC/400 Hz RESISTIVE
50,000 OPERATIONS

DR. RB 8/6/93 CK. TLG 8-17-01

CII Technologies
advanced control electronic solutions

CUST. OPL
CUST. NO. M5757/23-004 REV.

"07" RELAY

B07D934BC2-0052