


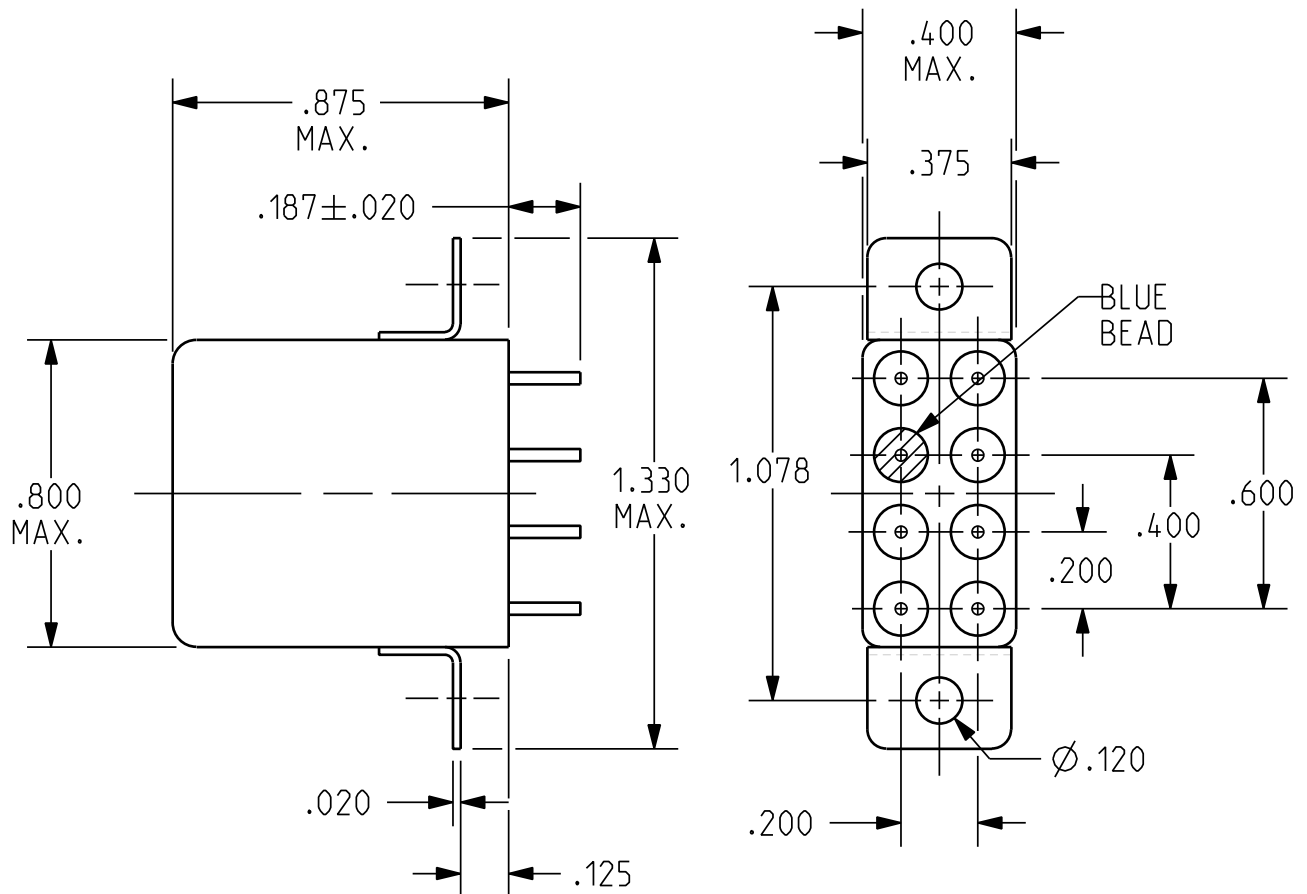

REV. 0

DCO 144086


COIL: @ 25°C	
RESISTANCE	675 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	1.47 VDC

ENVIRONMENT:

VIBRATION 10 Hz TO 2000 Hz @ 20 g's
 SHOCK 100 g's 6 ±1 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 5 MS MAX.
 CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

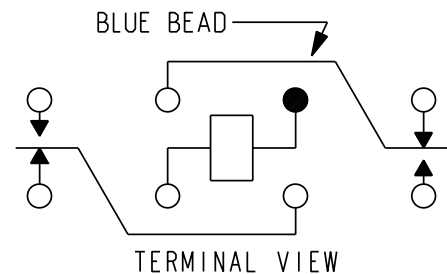

CONTACT RATING: 3 AMPS 28 VDC
 RESISTIVE 100,000 OPERATIONS

DR. B.D. 23AUG2005

CK. JMB 8/23/05

CII Technologies
 advanced control electronic solutions

CUST. CII STD.
 CUST. NO. REV.

"FW" RELAY

FW 1205G00