


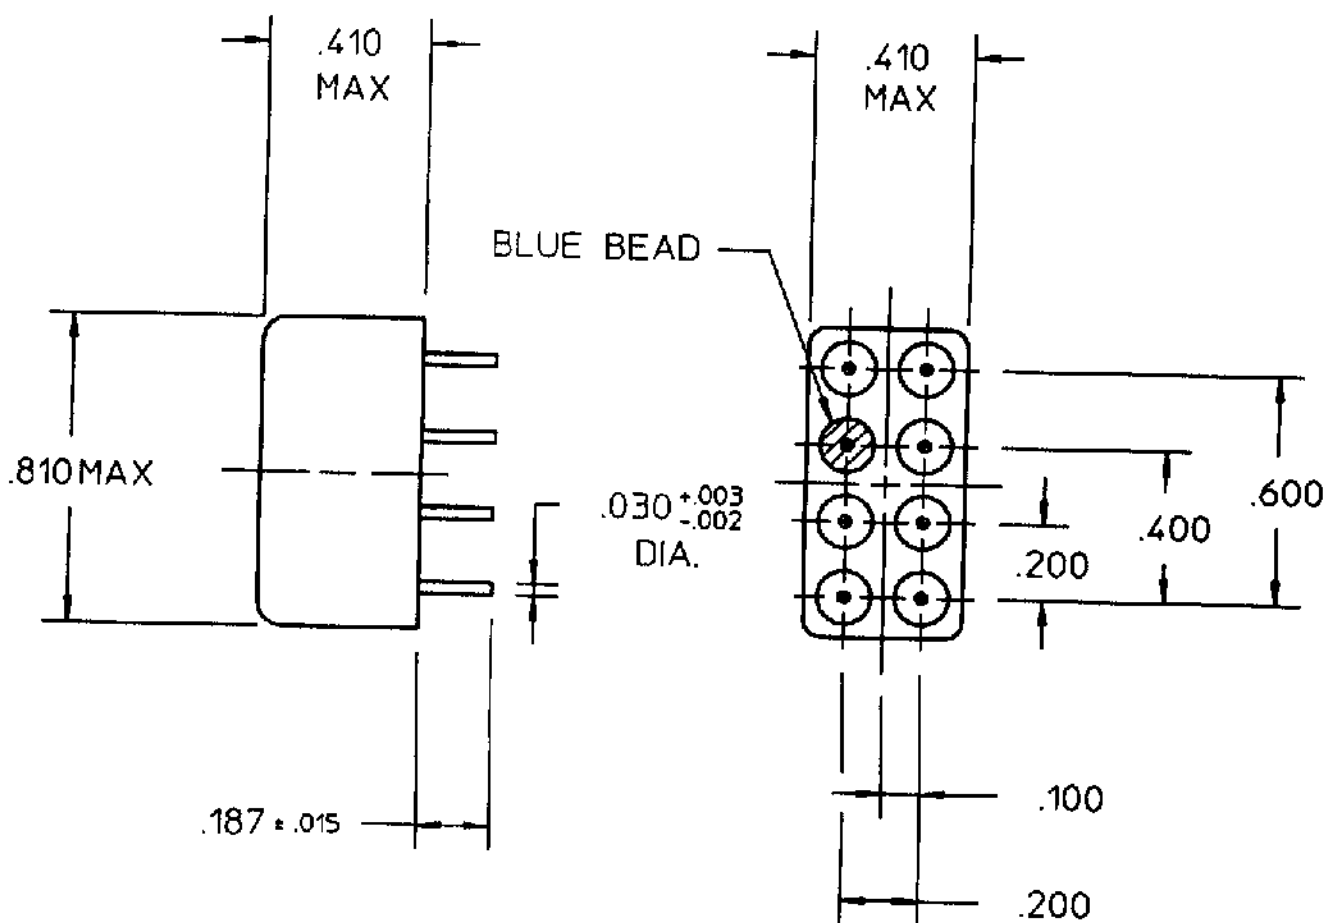

COIL: @ +25 °C

RESISTANCE 160 OHMS ± 10%

NOMINAL VOLTAGE 12.0 VDC

MUST OPERATE 6.4 VDC

MUST RELEASE 0.7 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's


SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES:

CUSTOMER DATA SHEET

BLUE BEAD

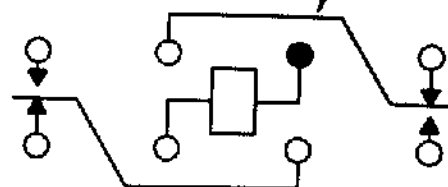

CONTACT RATING: LOW LEVEL TO 5A
28 VDC RESISTIVE 100,000
OPERATIONS MIN.

DR. R.B. 6/11/92 CK. 6/11/92

**COMMUNICATIONS
INSTRUMENTS, INC.**

CUST. C. I. I. STD.

CUST. NO.

TYPE HFW5A RELAY

HFW5A1201G00