



KILOVAC KCS03 CURRENT-SENSING HIGH-VOLTAGE CONTACTOR

600 A/28 VDC - 600 VDC Bi-Directional Power Switching in
a Rugged, Compact Package with Integrated Current Sensor and
Current Trip Function

KILOVAC KCS03 Current-Sensing High-Voltage Contactor

Compact Package with Integrated Current Sensor and Current Trip Function



The new KILOVAC Current Sensing contactors from TE Connectivity (TE) eliminate the need for a discrete current sensor, saving the customer money, weight and space. The sensor function also has a programmable trip feature, allowing for immediate, delayed or disabled trip.

Rugged Reliability

In addition to the integrated current sensing feature, KCS03 contactors are rugged and hermetically sealed, making them suitable for a variety of applications in harsh, corrosive and explosive environments. Even after long periods of non-operation, the contacts are impervious to oxidation and contamination.

Versatile and Efficient

The KCS03 contactor is extremely small and lightweight. It features bidirectional switching and an integrated dual-coil electronic economizer with internal coil suppression, and can be mounted in any orientation. Main contacts are not polarity sensitive, and the KCS03 is EMC compliant with no radiated coil emissions.

Specifications

MAIN CONTACTS

- **Contact Arrangement:** SPST-NO (Form X)
- **Voltage Rating, Switching:** 600 VDC max.
- **Current Rating, Continuous:** ± 600 A
- **Current Rating, Short Term:** ± 1200 A / 30 sec
- **Contact Resistance, Main Contacts:** 0.2 m Ω max. at rated current
- **Hot-Switching Performance, Resistive Load**
 - 1 A / 600 VDC: 1,000,000 cycles
 - 100 A / 28 VDC: 100,000 cycles
 - 100 A / 400 VDC: 25,000 cycles
 - 100 A / 600 VDC: 20,000 cycles
 - 1000 A / 28 VDC: 100 cycles
 - 1000 A / 400 VDC: 10 cycles
 - 1000 A / 600 VDC: 5 cycles
- **Maximum Pulse Through Closed Contacts:** 3000 A (half cycle, 60 Hz)
- **Dielectric Withstanding Voltage:**
 - Between Open Contacts: 2800 V_{rms}
 - Contacts to Coil: 2800 V_{rms} / 4000 VDC
- **Insulation Resistance (Terminal to Terminal; Terminals to Coil):**
 - Beginning of Life 100 M Ω min. @ 500 VDC
 - End of Life 50 M Ω min. @ 500 VDC

INTEGRATED CURRENT SENSOR

- Saves space by eliminating the need for external sensor
- Simplifies design
- Flexible configuration for application needs

HERMETICALLY SEALED

- Suitable for application in many harsh, explosive, and corrosive environments
- No oxidation or contamination of contacts, including long periods of non-operation

SPACE AND WEIGHT SAVINGS

- Extremely small size
- Lightweight contactor: 500 grams

VERSATILE

- Bidirectional switching
- Main contacts not polarity sensitive
- Not position sensitive: mounts in any orientation

EFFICIENT

- Integrated dual-coil electronic economizer with coil suppression
- EMC compliant: no radiated coil emissions

APPLICATIONS

- Energy Storage/Battery Storage
- Power Distribution
- Power Motion Control
- High-Voltage DC Converter Systems
- Alternative Energy
- Military and Commercial Electric Vehicles
- Test Equipment

KILOVAC KCS03 Current-Sensing High-Voltage Contactor

AUXILIARY CONTACTS

- **Auxiliary Contacts Contact Arrangement:**
SPST-NO (Form A)
- **Auxiliary Contact Rating:** 1 A/ 30VDC, 3 A/125 Vac
- **Switching Life at Max. Rating:** 100,000 cycles min.
- **Minimum Load:** 5 VDC/5 mA

MECHANICAL/ENVIRONMENTAL


- **Mechanical Life:** 1,000,000 cycles
- **Shock:** 11 ms 1/2 sine (operating), 20 g peak
- **Sine Vibration:** 20 g peak (operating), 55-2000 Hz
- **Operating Temperature Range:** -40 to +105 °C
- **RoHS Compliant**
- **Weight, Nominal:** 500 grams
- **Hermetically Sealed:** Safe for many harsh/corrosive environments
- **Nonoxidizing:** No contact oxidation over periods of nonuse
- **Mounting:** Not position-sensitive
- **Noise Emission (at 100 mm distance):** 70 dBa

Coil Data

At 20°C (Internal Two-Coil Economizer)

	12 V Coil	24/28 V Coil
Coil Voltage Range	9-14 VDC	18-28 VDC
Nominal Pickup Current	4.5 A	4.5 A
Nominal Holding Current	0.26 A	0.23 A
Pickup Voltage	≥9 VDC	≥16 VDC
Dropout Voltage	≤3.5 VDC	≤10 VDC
Pickup Pulse (max)	50 ms	50 ms
Coil Resistance ±5% Coil Holding Power	2.0 Ω Pickup/45 Ω Hold 3.2 W	5.7 Ω Pickup/120 Ω Hold 4.8 W
Main Contacts:		
Operate Time (max)	20 ms	20 ms
Operate Bounce (max)	3 ms	3 ms
Release Time	5 ms	5 ms
Current Sensing		
Sensing Range (5% accurate -40°C to +105°C)	±50 – 630 A	±50 – 630 A
Null Output @ I = 0	2.5 (±0.04) VDC	2.5 (±0.04) VDC
Output Voltage vs. Current (VDC)	$V(I) = \pm I (.0034) + 2.50$	
Current Trip Point vs. Setpoint Resistance	See Pages 5 and 6	
Hysteresis (-40°C to + 105°C)	1% of Full Scale Output	

KILOVAC KCS03 Current-Sensing High-Voltage Contactor

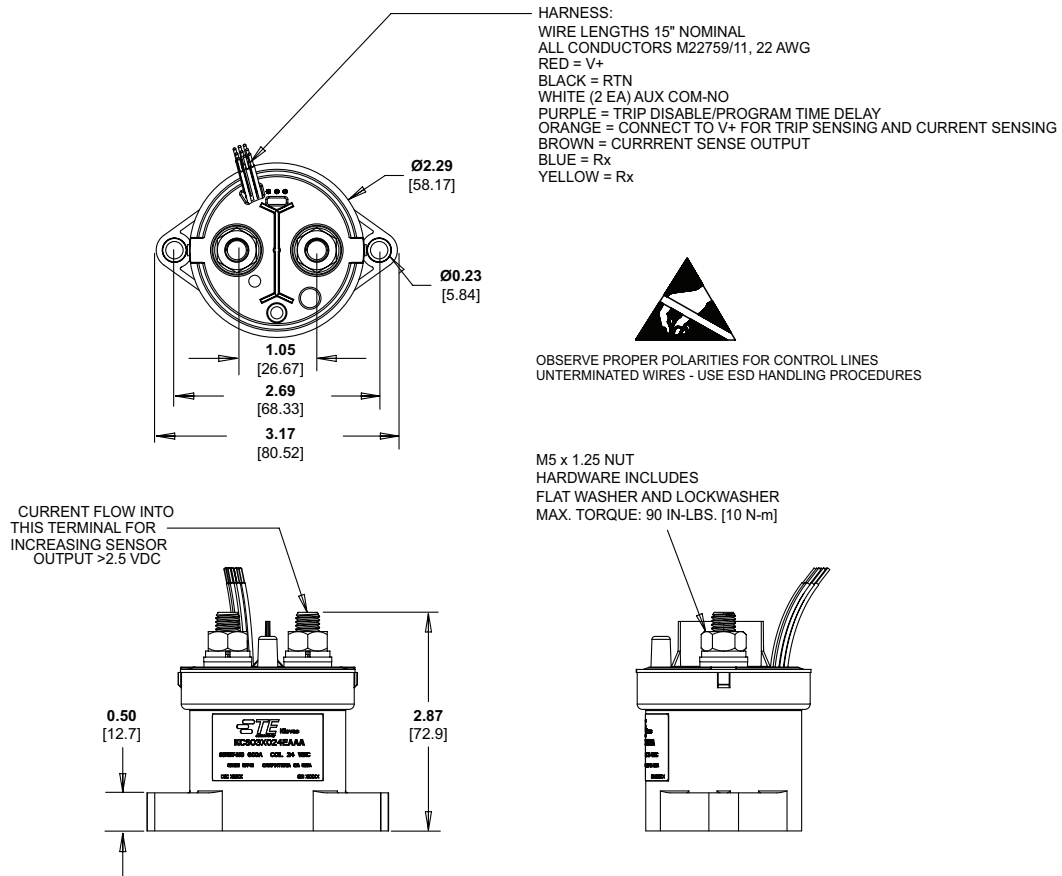

Part Numbering System

The diagram illustrates the breakdown of the part number **024E-A-A-A** into its constituent parts:


- SERIES** **KCS** KILOVAC Current Sensing
- SIZE** **03** Size 03 (EV200 Package)
- CONFIGURATION** **X** Form X, Normally Open
- COIL VOLTAGE** **024E** 24 V Coil Economized
- COIL LEAD LENGTH** **A** 15 Inch Coil Leads
- MOUNTING HARDWARE** **A** M8 Male Terminals
- MOUNTING STYLE** **A** Bottom Mount

Part Numbers


Coil Voltage	Part No.
12 VDC	KCS03X012EAAA
24 VDC	KCS03X024EAAA

KILOVAC KCS03 Current-Sensing High-Voltage Contactor


Load Life: Resistive Load Switching

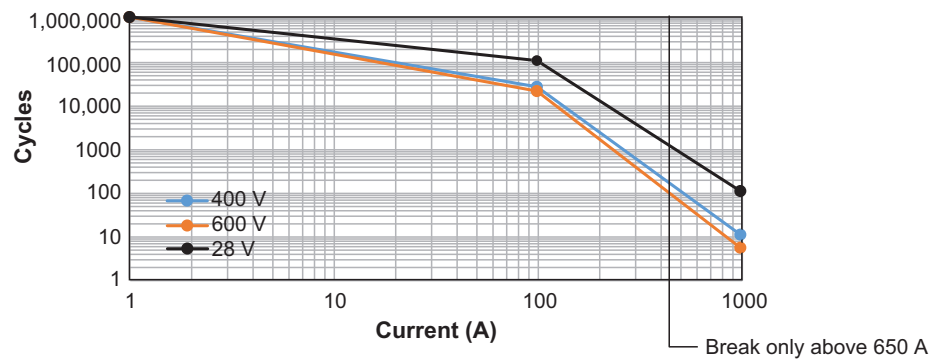

Current Carry vs. Time (≥ 350 KCMIL Conductor)

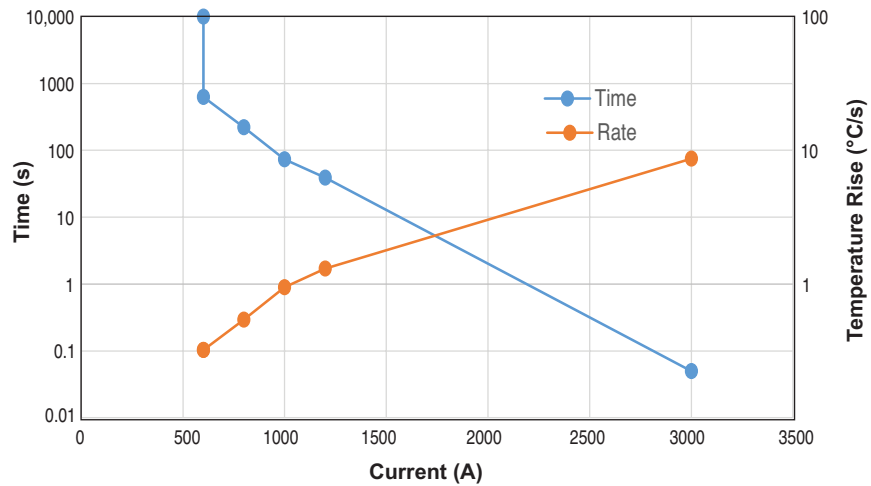

Trip Function/Trip Delay (50 A to 630 A)

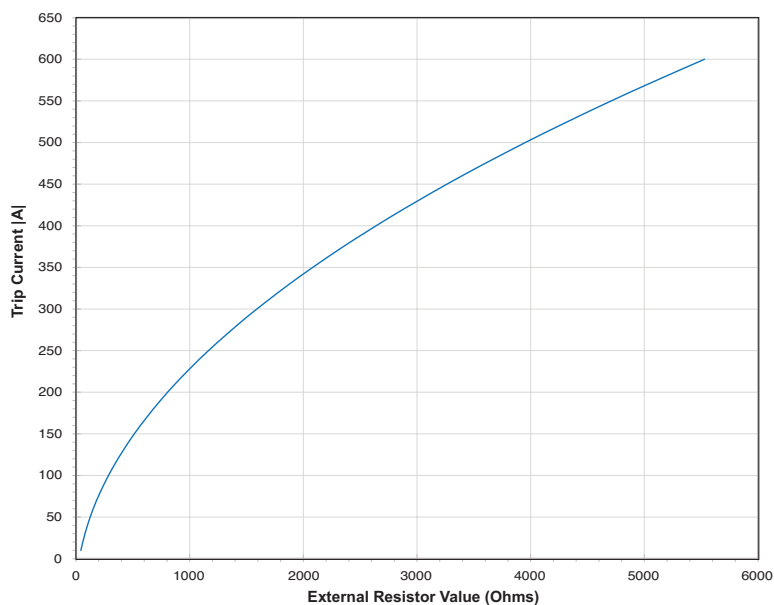

KILOVAC KCS03 Current-Sensing High-Voltage Contactor

Trip Setpoint Resistor (50 A to 630 A)

Connect Rx across Blue and Yellow for Trip Setpoint

Connect Purple to RTN to Disable Trip Function or Connect Purple to External Capacitor Tied to RTN to Delay Trip, 7 ms/ μ F

Connect Orange to V+ To Enable Trip and Current Sensing


Reset Tripped Contacts by Cycling V+ Off to On

Intrinsic Trip Delay (Blue/Yellow Not Connected to Rx) = 14 ms


Input						Output		
Sensing Control (Orange)	V+ (Red)	RTN (Black)	Main Contacts (Current +/- ADC)	Trip Disable/ Time Delay (Purple)	Trip Set Rx (Blue) Trip Set Ax (Yellow)	Hall Output (VDC) (Brown)	Main Contacts	Aux. Contact (N.O.) White/White
0	9-14 or 18-28	0	0	NON-ACTIVE	NON-ACTIVE	0	ON (NO TD)	ON (NO TD)
0	0	0	0	NON-ACTIVE	NON-ACTIVE	0	OFF (NO TD)	OFF (NO TD)
V+	0	0	0	OPEN	OPEN	2.5	OFF	OFF
V+	9-14 or 18-28	0	500 A $\pm$ 7%	OPEN	4.2 K	4.145 (2.5 V when tripped)	RELAY TRIP OPEN AFTER 14 ms	RELAY TRIP OPEN AFTER 14 ms
V+	0, then 9-14 or 18-28 remove and re-apply power	0	$\leq$ 464	OPEN	4.2 K	2.5	ON (NO TD)	ON (NO TD)
V+	9-14 or 18-28	0	0	GND (TRIP DISABLE)	X	2.5	ON (NO TD)	ON (NO TD)
V+	9-14 or 18-28	0	500 A $\pm$ 7%	GND (TRIP DISABLE)	X	4.145	ON (NO TD)	ON (NO TD)
V+	0	0	0	GND (TRIP DISABLE)	X	2.5	OFF (NO TD)	OFF (NO TD)
V+	9-14 or 18-28	0	0	1 μ F is added between these two wires	4.2 K	2.5	ON (NO TD)	ON (NO TD)
V+	9-14 or 18-28	0	500 A $\pm$ 7%	10 μ F is added between these two wires	4.2 K	4.145 (2.5 V when tripped)	RELAY TRIP OPEN AFTER 82 ms	RELAY TRIP OPEN AFTER 82 ms
V+	9-14 or 18-28	0	500 A $\pm$ 7%	100 μ F is added between these two wires	4.2 K	4.145 (2.5 V when tripped)	RELAY TRIP OPEN AFTER 720 ms	RELAY TRIP OPEN AFTER 720 ms
V+	0, then 9-14 or 18-28 remove and re-apply power	0	$\leq$ 464	100 μ F is added between these two wires	4.2 K	2.5	ON (NO TD)	ON (NO TD)

KILOVAC KCS03 Current-Sensing High-Voltage Contactor

Timing Diagram

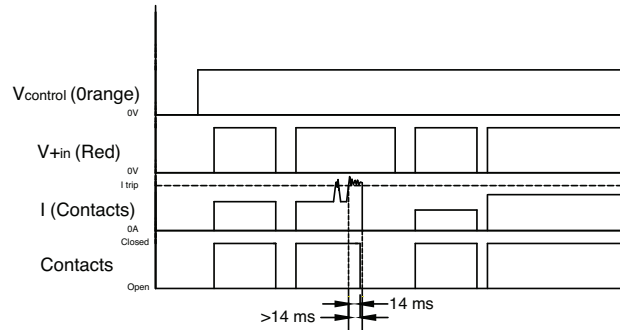

Connection Diagram

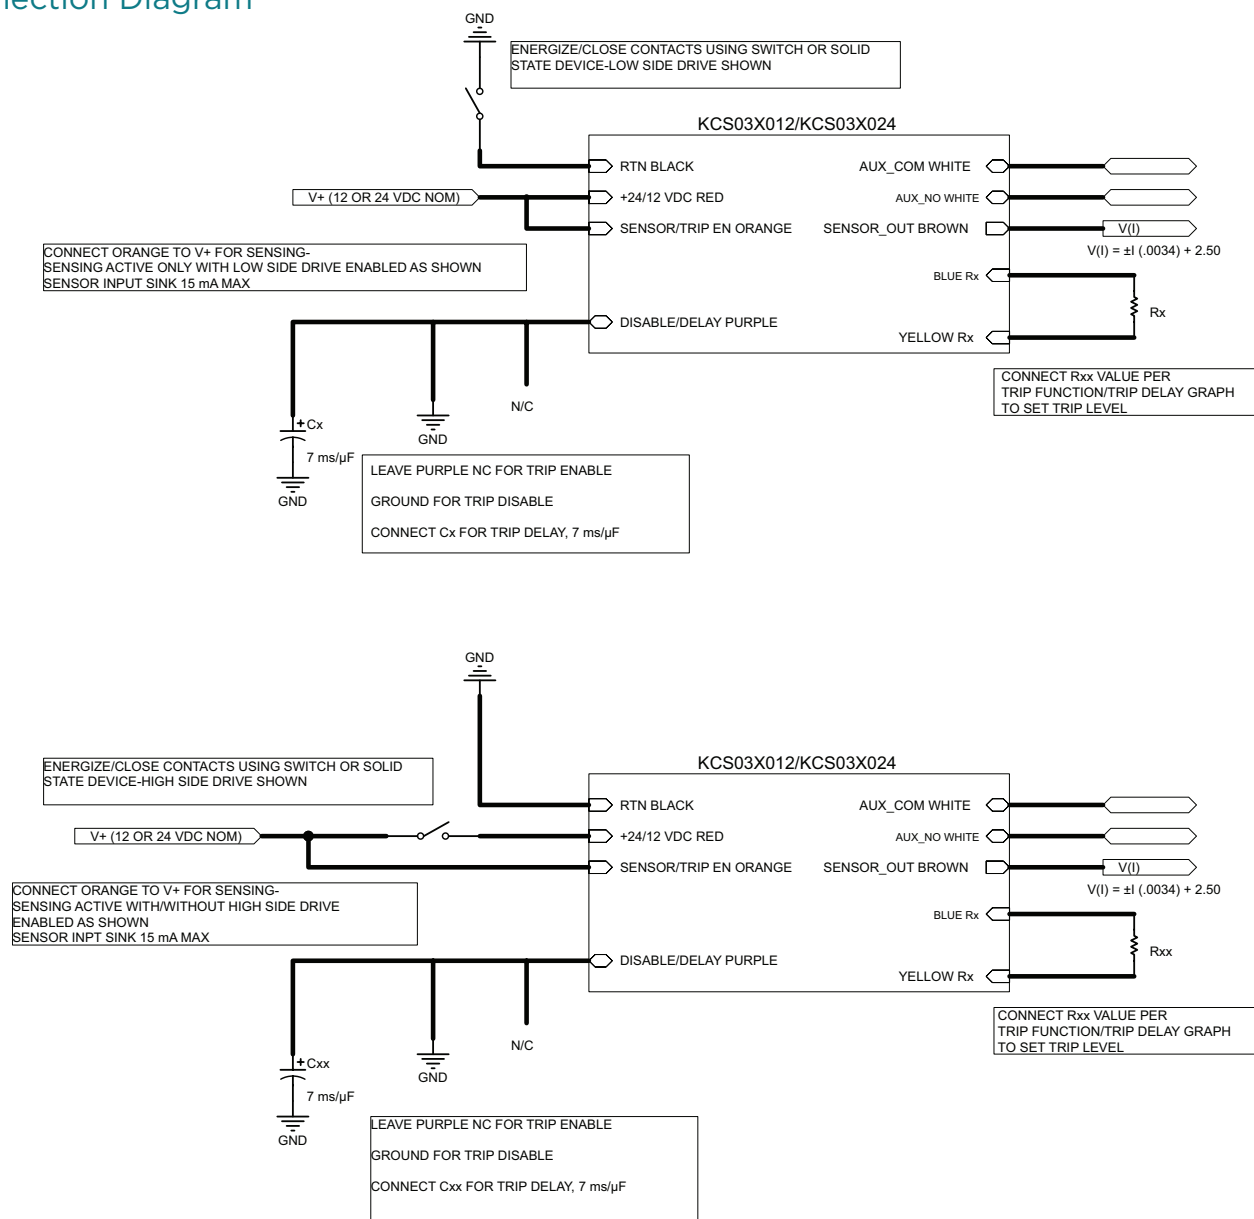

Connect With Us

We make it easy to connect with our experts and are ready to provide the support you need.

Visit te.com/support to chat with a Product Information Specialist.

te.com/kcs03

KILOVAC, TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity assumes only those obligations set forth in the terms and conditions for this product and shall in no event be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

©2025 TE Connectivity. All Rights Reserved.

1-1773905-4 09/25

TE Connectivity
Aerospace, Defense & Marine
2900 Fulling Mill Road
Middletown, PA 17057