



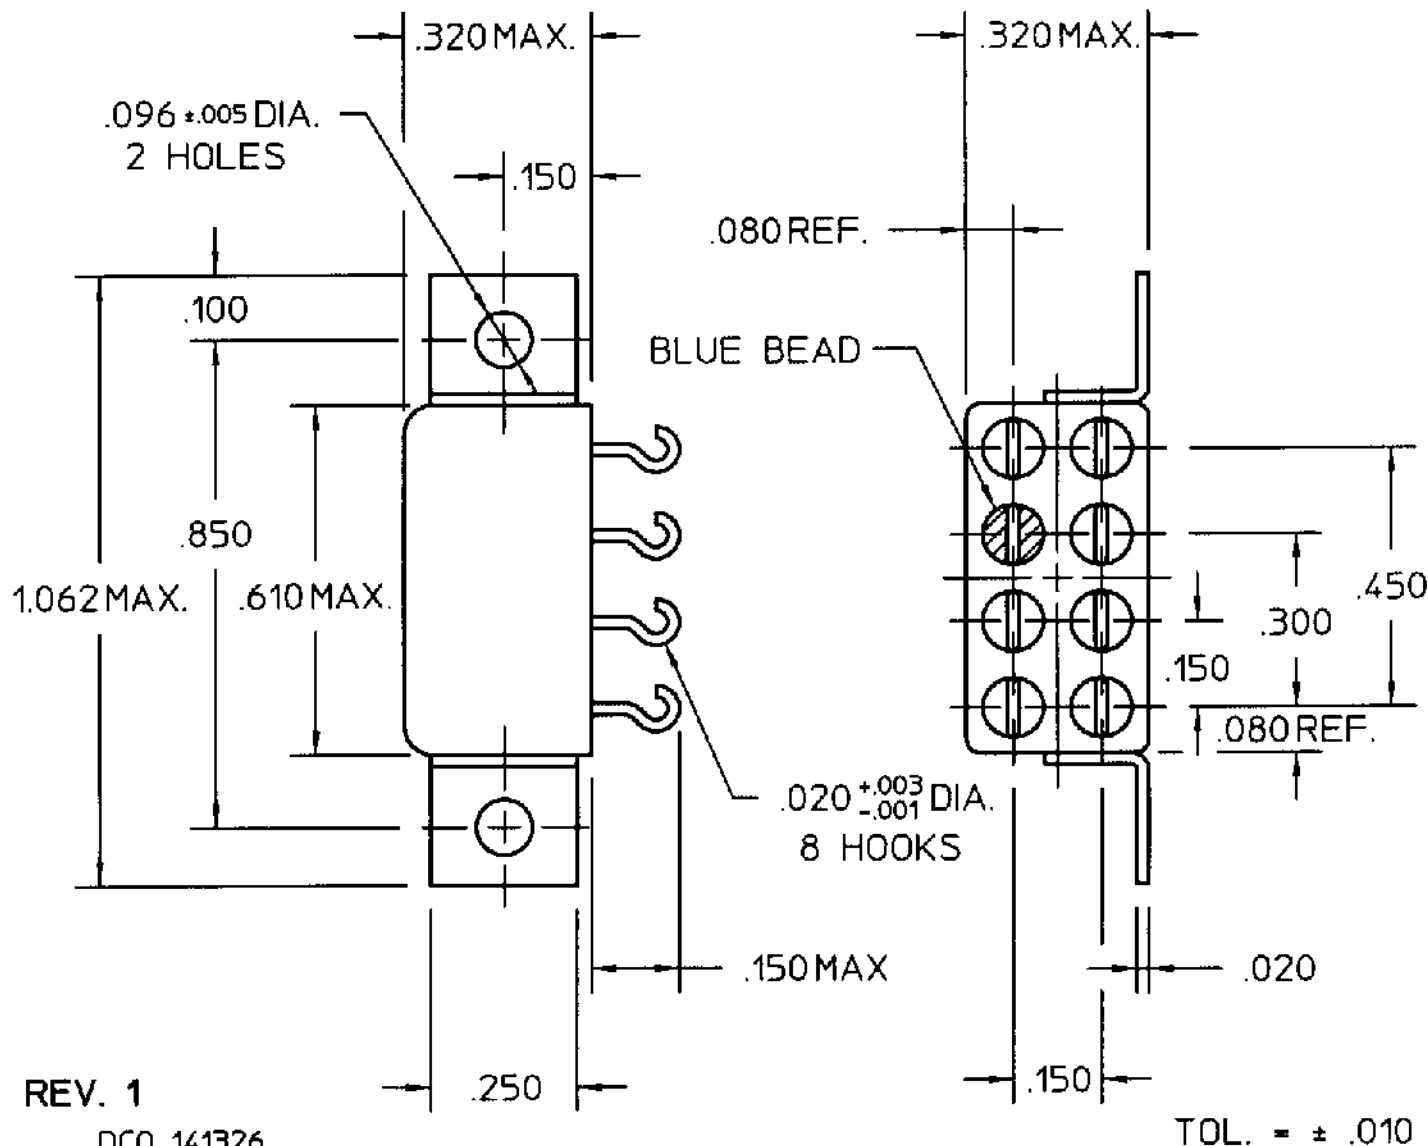

COIL: @ 25°C  
 RESISTANCE 1350 OHMS ± 10%  
 NOMINAL VOLTAGE 26.5 VDC  
 MUST OPERATE 13.5 VDC  
 MUST RELEASE 8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:  
 VIBRATION 10 CPS TO 3000 CPS @ 30 g's  
 SHOCK 75 g's 6 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C  
 NOTES: OPERATE & RELEASE 4 MS MAX.  
 BOUNCE 2 MS MAX.

## CUSTOMER DATA SHEET

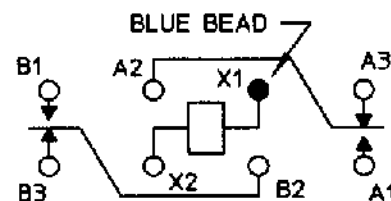

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO  
 2 AMPS 28 VDC RESISTIVE  
 50,000 OPERATIONS

DR. R.B. 8/25/97 CK.GgH 9/20/99

COMMUNICATIONS  
 INSTRUMENTS, INC.

CUST. OPL  
 CUST. NO. M39016/13-060L REV. '3SBC' RELAY

3SBC1506A2