

PCB Relay with forcibly guided contacts 8 A



Hoists and cranes



Escalators



Medical and
dentistry



Hospitals



Carousel
warehouses






Elevators
and lifts



Disabled lift



Wood-
processing
machines

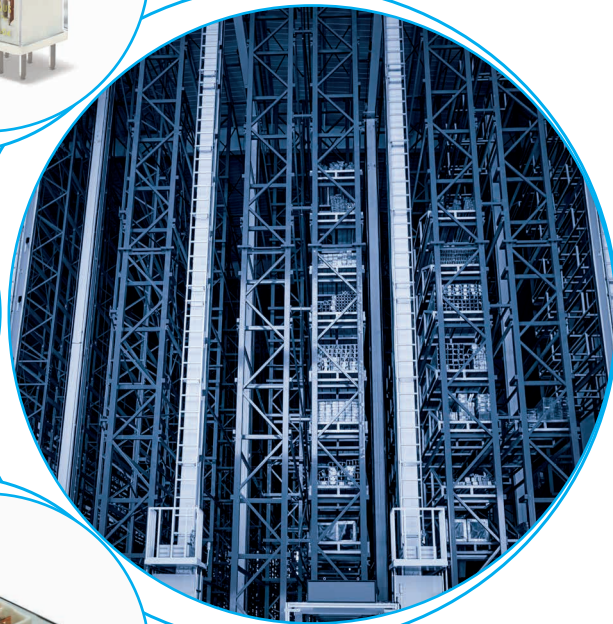

PCB Relay with forcibly guided contacts according to EN 61810-3 (previously EN 50205)

Type B

2 CO contacts*

Type 50.12...x000

- 2 pole 8 A
- Contact AgNi, AgSnO₂

Type 50.12...5000

- 2 pole 8 A
- Contact AgNi + Au

- High physical separation between adjacent contacts
- Cadmium Free contact materials
- 8 mm, 6 kV (1.2/50 µs) isolation, coil-contacts
- "Enclosed break device" relay version tested according to **ATEX** EN 60079-1 § 15.5 following «dc» method for group IIA gases
- Flux proof: RT II

* According to EN 61810-3 only 1 NO and 1 NC (11-14 and 21-22 or 11-12 and 21-24) shall be used as forcibly guided contacts.

For UL RATINGS SEE:

"General technical information" page V

For outline drawing see page 7

Contact specification

Contact configuration		2 CO (DPDT)	2 CO (DPDT)
Rated current/Maximum peak current	A	8/15	8/15
Rated voltage/Maximum switching voltage	V AC	250/400	250/400
Rated load AC1	VA	2000	2000
Rated load AC15 (230 V AC)	VA	500	500
Single phase motor rating (230 V AC)	kW	0.37	0.37
Breaking capacity DC1: 24/110/220 V	A	8/0.65/0.4	8/0.65/0.4
Minimum switching load	mW (V/mA)	500 (10/10)	50 (5/5)
Standard contact material		AgNi, AgSnO ₂	AgNi + Au

Coil specification

Nominal voltage (U _N)	V AC (50/60 Hz)	—	—
	V DC	5 - 6 - 12 - 24 - 48 - 60 - 110 - 125	5 - 6 - 12 - 24 - 48 - 60 - 110 - 125
Rated power AC/DC	VA (50 Hz)/W	—/0.7	—/0.7
Operating range	AC (50 Hz)	—	—
	DC	(0.75...1.2)U _N	(0.75...1.2)U _N
Holding voltage	AC/DC	—/0.4 U _N	—/0.4 U _N
Must drop-out voltage	AC/DC	—/0.1 U _N	—/0.1 U _N

Technical data



Mechanical life AC/DC	cycles	—/10 · 10 ⁶	—/10 · 10 ⁶
Electrical life at rated load AC1	cycles	100 · 10 ³	100 · 10 ³
Operate/release time	ms	10/4	10/4
Insulation between coil and contacts (1.2/50 µs)	kV	6 (8 mm)	6 (8 mm)
Dielectric strength between open contacts	V AC	1500	1500
Ambient temperature range	°C	−40...+70	−40...+70
Environmental protection		RT II	RT II

Approvals (according to type)

50.12...x000



- For medium duty switching, suggested for DC loads
- 2 pole 8 A
- 5 mm pinning
- PCB mounting
- Group IIA gases version





Copper side view

50.12...5000



- For safety applications
- Gold plate contacts for low level switching capability
- 5 mm pinning
- PCB mounting
- Group IIA gases version



Copper side view

**PCB Relay with forcibly guided contacts
according to EN 61810 (previously EN 50205)
Type A**

Type 50.14...4220/4310

- 4 pole 8 A (2 NO + 2 NC) or (3 NO + 1 NC)
- Contact AgSnO₂

Type 50.16...5420/5510/5330


- 6 pole 8 A (4 NO + 2 NC) or (5 NO + 1 NC) or (3 NO + 3 NC)
- Contact AgSnO₂ + Au

- High physical separation between adjacent contacts
- Cadmium Free contact materials
- DC coil 800 mW
- 8 mm, 6 kV (1.2/50 µs) isolation, coil-contacts
- PCB mounting
- Wash tight: RT III

50.14



- For safety applications
- 4 pole 8 A
- PCB mounting




Copper side view

50.16



- For safety applications
- 6 pole 8 A
- PCB mounting

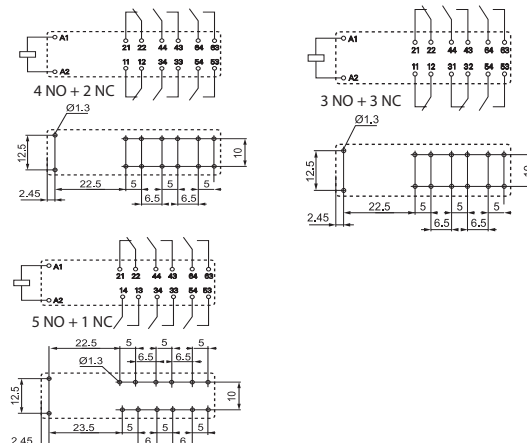

Copper side view

FOR UL RATINGS SEE:

"General technical information" page V

For outline drawing see page 7

Contact specification

Contact configuration	2 NO + 2 NC, 3 NO + 1 NC	4 NO + 2 NC, 5 NO + 1 NC, 3 NO + 3 NC
Rated current/Maximum peak current	A	8/15
Rated voltage/ Maximum switching voltage	V AC	250/400
Rated load AC1	VA	2000
Rated load AC15 (230 V AC)	VA	700
Single phase motor rating (230 V AC)	kW	0.37
Breaking capacity DC1: 24/110/220 V	A	8/0.6/0.2
Minimum switching load	mW (V/mA)	50 (5/10)
Standard contact material	AgSnO ₂	AgSnO ₂ + Au

Coil specification

Nominal voltage (U _N)	V AC (50/60 Hz)	—	—
	V DC	12 - 24 - 48 - 110	12 - 24 - 48 - 110
Rated power AC/DC	VA (50 Hz)/W	—/0.8	—/0.8
Operating range	AC (50 Hz)	—	—
	DC	(0.75...1.2)U _N	(0.75...1.2)U _N
Holding voltage	AC/DC	—/0.4 U _N	—/0.4 U _N
Must drop-out voltage	AC/DC	—/0.1 U _N	—/0.1 U _N

Technical data


Mechanical life AC/DC	cycles	—/10 · 10 ⁶	—/10 · 10 ⁶
Electrical life at rated load AC1	cycles	100 · 10 ³	100 · 10 ³
Operate/release time	ms	10/4	10/4
Insulation between coil and contacts (1.2/50 µs)	kV	6 (8 mm)	6 (8 mm)
Dielectric strength between open contacts	V AC	1500	1500
Ambient temperature range	°C	−40...+70	−40...+70
Environmental protection		RT III	RT III

Approvals (according to type)



Ordering information

Example: 50 series forcibly guided contacts, 2 CO (DPDT) 8 A contacts, 24 V DC coil.

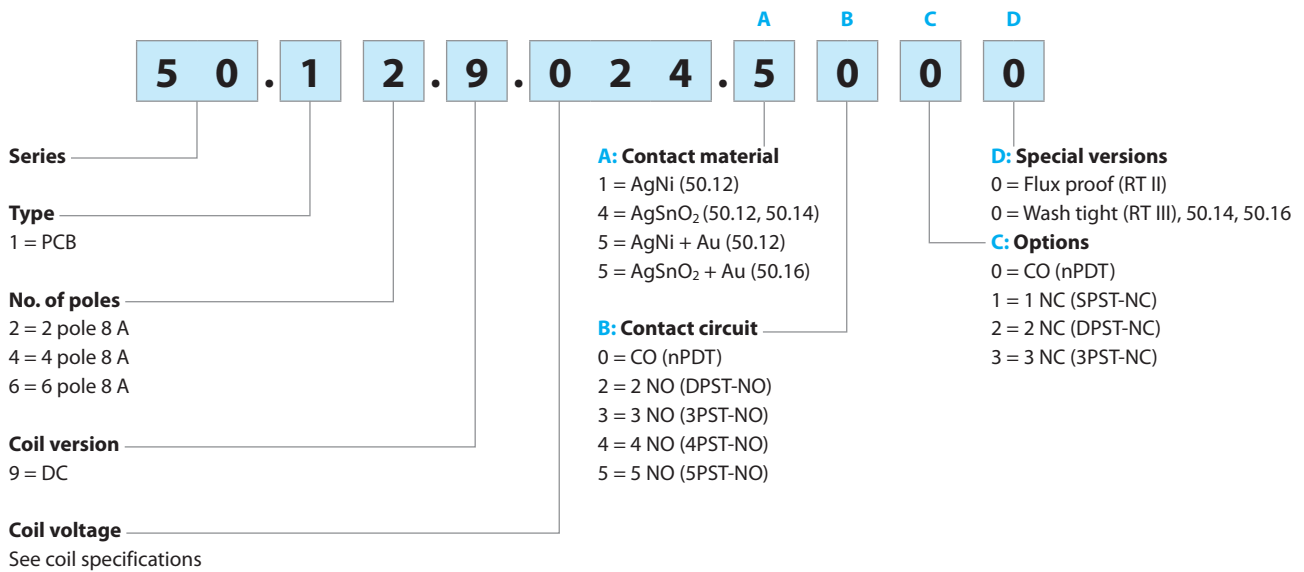


Technical data


Insulation according to EN 61810-1				
Nominal voltage of supply system	V AC	230/400		
Rated insulation voltage	V AC	250		400
Pollution degree		3		2
Insulation between coil and contact set				
Type of insulation		Reinforced (8 mm)		
Overvoltage category		III		
Rated impulse voltage	kV (1.2/50 µs)	6		
Dielectric strength	V AC	4000		
Insulation between adjacent contacts				
Type of insulation		Basic		
Overvoltage category		III		
Rated impulse voltage	kV (1.2/50 µs)	4		
Dielectric strength (50.12, 50.16)	V AC	3000		
Dielectric strength (50.14)	V AC	2500		
Insulation between open contacts				
Type of disconnection		Micro-disconnection		
Dielectric strength	V AC/kV (1.2/50 µs)	1500/2.5		
Insulation between coil terminals				
Rated impulse voltage (according to EN 61180)	kV (1.2/50 µs)	2		
Other data				
Bounce time: NO/NC	ms	2/10		
Vibration resistance (10...200)Hz: NO/NC	g	20/6		
Shock resistance NO/NC	g	20/5		
Power lost to the environment	without contact current	W	0.7	
	with rated current	W	1.2	
Recommended distance between relays mounted on PCB	mm	≥ 5		

Contact specification


F 50 - Electrical life (AC) v contact current (type 50.12)

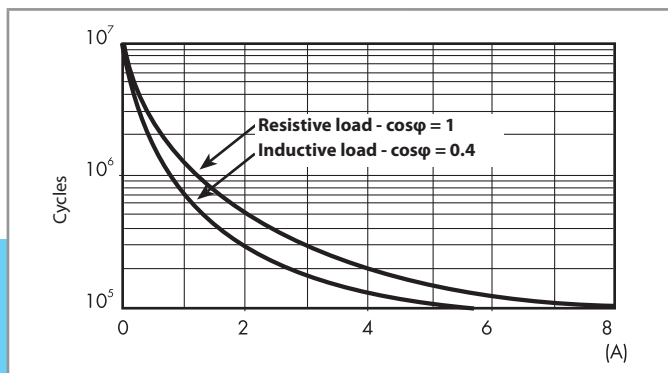

H 50 - Maximum DC1 breaking capacity (type 50.12)

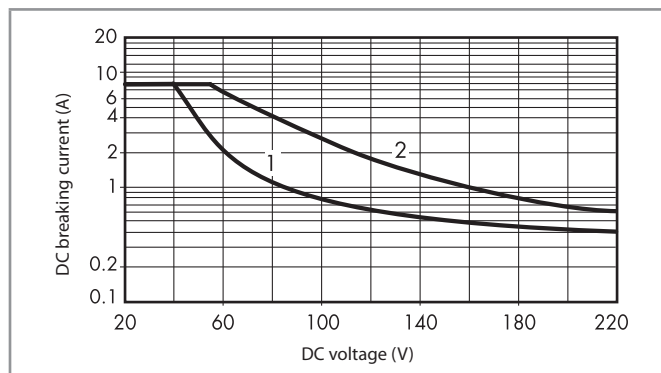

- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of $\geq 100 \cdot 10^3$ can be expected.
 - In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load.
- Note: the release time for the load will be increased.

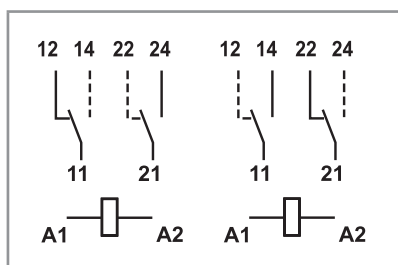

Alternative selection of NO and NC contacts to provide Forcibly guided (mechanically linked) contacts, in accordance with EN 61810-3 (type B).

Coil specifications

DC coil data (type 50.12)


Nominal voltage U_N	Coil code	Operating range		Resistance R	Rated coil consumption I at U_N
		U_{min}	U_{max}		
V		V	V	Ω	mA
5	9.005	3.8	6	35	143
6	9.006	4.5	7.2	50	120
12	9.012	9	14.4	205	58.5
24	9.024	18	28.8	820	29.3
48	9.048	36	57.6	3280	14.4
60	9.060	45	72	5140	11.7
110	9.110	82.5	131	17250	6.4
125	9.125	93.7	150	22300	5.6

DC coil data (type 50.14/16)

Nominal voltage U_N	Coil code	Operating range		Resistance R	Rated coil consumption I at U_N
		U_{min}	U_{max}		
V		V	V	Ω	mA
12	9.012	9	14.4	180	66.6
24	9.024	18	28.8	720	33.3
48	9.048	36	57.6	2880	16.6
110	9.110	82.5	131	15125	7.7

R 50 - DC coil operating range v ambient temperature

Standard coil (type 50.12)

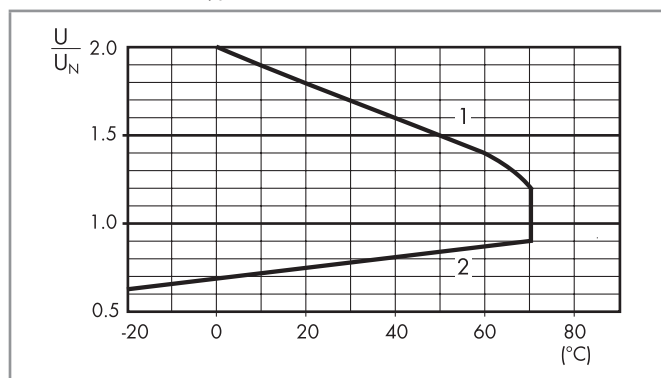


1 - Max. permitted coil voltage.


2 - Min. pick-up voltage with coil at ambient temperature.

Contact specification

F 50 - Electrical life (AC) v contact current (type 50.14)

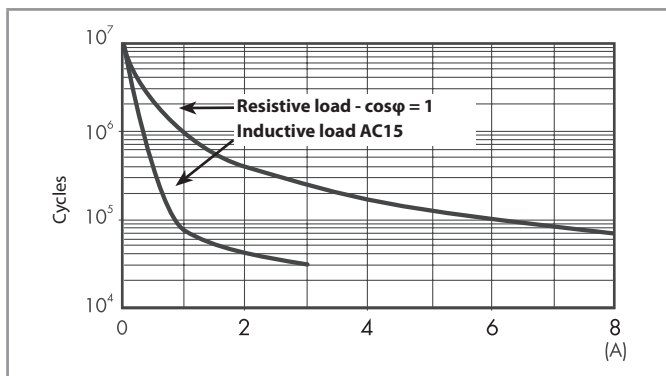


H 50 - Maximum DC1 breaking capacity (type 50.14)

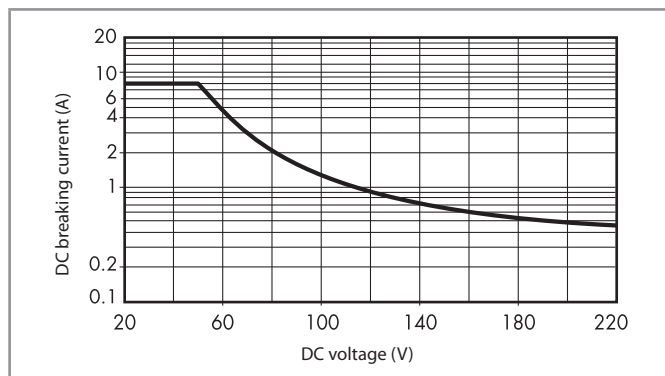


- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of $\geq 100 \cdot 10^3$ can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load.
Note: the release time for the load will be increased.

F 50 - Electrical life (AC) v contact current (type 50.16)

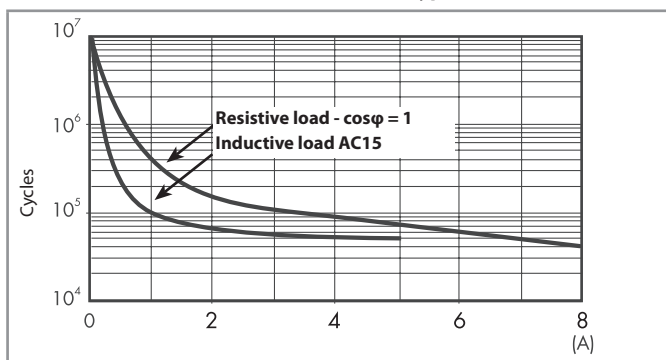


H 50 - Maximum DC1 breaking capacity (type 50.16)

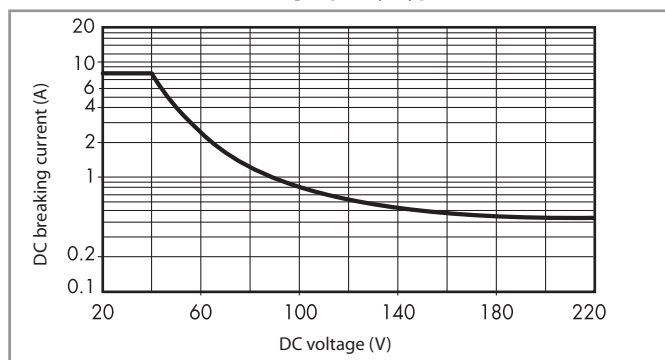


- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of $\geq 100 \cdot 10^3$ can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load.
Note: the release time for the load will be increased.

Outline drawings

Types 50.12...x000/50.12...5000



Type 50.14



Type 50.16

